

# STANDARD-SIZED SECURI-STEEL HINGED DOORS

Securi-Steel Hinged Doors are available in single leaf configuration and can be used for Security and/or Fire Escape applications.

## CONSTRUCTION SPECIFICATION

### Door Leaf

The door leaf has an overall thickness of 45mm and is manufactured from two skins of 1.0mm thick zinc plated sheet steel which are folding and spot welded, providing a smooth flush surface. The door leaf is rebated on three sides, hung on four adjustable stainless steel hinges and secured by means of anti-jemmy bolts fitted into the frame. The leaf infill is constructed from 25mm honeycomb cell resin impregnated paper core.

### Frame

The standard box frame has a depth of 90mm and is fully welded and constructed from a purpose made 2.0mm thick Roll-formed zinc plated steel section, incorporating a 12mm high stainless steel threshold. Matching side frame extension kit available to increase width by 65mm.

### Surface Treatment

**Standard:** Light Grey Polyester paint finish.

**Extra:** Polyester Powder Coat paint finish to leaf and frame any BS4800 or RAL range colour (subject to availability).


### Standard Fitout

#### Security Door

Sash Lock with interchangeable Euro-profile cylinder with DIN standard lock and three keys.

#### Fire Escape

CE marked 2-point locking with satin aluminium panic bolt.

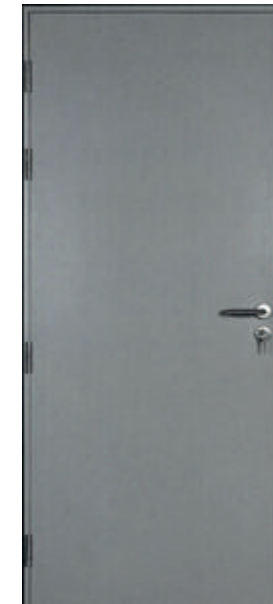

**SECURI-DOORS**  
SERVICES LIMITED

9 STANBOROUGH MEWS  
WELWYN GARDEN CITY  
HERTFORDSHIRE  
AL8 6DB

INFO@SECURI-DOORS.CO.UK  
WWW.SECURI-DOORS.CO.UK

**01707 886887**

### STANDARD SIZE RANGE

Overall Frame Size	Structural Size
890mm x 2090mm	900mm x 2100mm
990mm x 2090mm	1000mm x 2100mm